


Phoenix **Thermal** Supply

Thermistor and RTD Extension Wire EXGG, EXTT and EXPP Series, 2, 3 and 4 Conductors

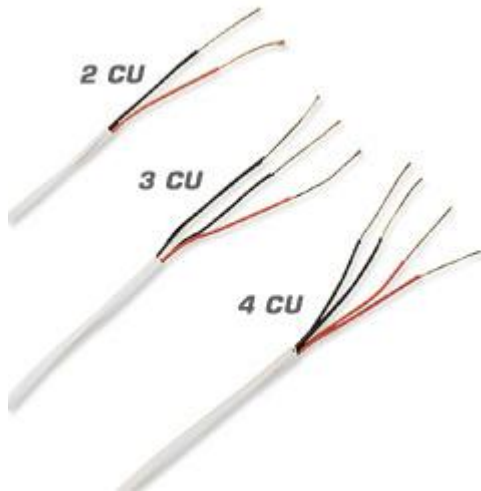

- ✓ RTD wire for Extending RTD and Thermistor Signal Leads
- ✓ High Temperature Glass, PFA and Polyvinyl Wire Insulation
- ✓ Wire Available with 2, 3 and 4 Conductors
- ✓ AWG 20 solid, 24 or 26 stranded
- ✓ Spool Lengths in Feet or Meters

| Insulation | Model Number | Number of Conductors | Type Wire | Insulation | | Max. Temp. | | Nominal Size (mm) | Wt.* kg/300m |
|--------------|--------------|----------------------|-----------|-------------|-------------|------------|-----|-------------------|--------------|
| | | | | Conductor | Overall | °F | °C | | |
| Glass | EXGG-2CU-20 | 2 | Solid | Glass Braid | Glass Braid | 900 | 482 | 1.52 x 2.41 | 4 |
| | EXGG-2CU-26S | 2 | 7 x 34 | Glass Braid | Glass Braid | 900 | 482 | 1.52 x 1.32 | 2.2 |
| | EXGG-3CU-26S | 3 | 7 x 34 | Glass Braid | Glass Braid | 900 | 482 | 1.52 x 1.63 | 3.1 |
| | EXGG-4CU-26S | 4 | 7 x 34 | Glass Braid | Glass Braid | 900 | 482 | 1.52 x 1.66 | 4.1 |
| Neoflon® PFA | EXTT-2CU-26S | 2 | 7 x 34 | PFA | PFA | 500 | 260 | 1.07 x 1.73 | 2.2 |
| | EXTT-3CU-26S | 3 | 7 x 34 | PFA | PFA | 500 | 260 | 1.83 | 4.1 |

Phoenix **Thermal** Supply

| | | | | | | | | | |
|-----------|--------------|---|--------|-----------|-----------|-----|-----|-------------|-----|
| | EXTT-4CU-26S | 4 | 7 x 34 | PFA | PFA | 500 | 260 | 2.08 | 4.1 |
| Polyvinyl | EXPP-2CU-24S | 2 | 7 x 32 | Polyvinyl | Polyvinyl | 221 | 105 | 2.08 x 3.40 | 4.5 |
| | EXPP-3CU-24S | 3 | 7 x 32 | Polyvinyl | Polyvinyl | 221 | 105 | 4.22 | 6.3 |

* Weight of spool and wire rounded up to the next highest kg. (does not include packing material).

